

## Summary

---

**Upgrading VIS-3013 series fingerprint time attendance terminal.**

## Discretion

---

Some devices, VIS-3013 series fingerprint time attendance terminal, which were shipped to customers should be applied for static display, however, some customers upgraded firmware of devices to baseline version directly for products testing or other purposes, causing some problems.

Or some devices, fingerprint time attendance terminal, which are V1.0.0 firmware, however, some customers want to upgrade the latest V1.1.0 firmware.

For these, we recommend customer to upgrade devices first before using.

## Preparation

---

1. Please download and install VS-AXESS client and SDKDemo on your computer in advance;
2. Make sure your device can be accessed;

## How to Upgrade VIS-3013 Series Devices

### Part 1: Main Control Module

#### Step 1:

Please download the **VS-AXESS** client for devices from official website link below;

<https://www.visionistech.com/en/vsaxess-desktop-software/>

# VSAXESS DESKTOP BY VISIONIS

**VSAXESS** is a powerful and complete Access control management software for Visionis products. This versatile and easy to use platform generates professional level reports and can integrate with CCTV systems to be managed under one software.

The real-time status of access control devices can be managed and controlled remotely with functions as emergency shut-down, open/close doors, full detailed description for card holders with biometric information. This software can manage up to 16 Visionis Access panels and CCTV devices.


Download Software

Firmware Update

Download User Manual


## Step 2:

Add device to **VS-AXESS** as the following picture:

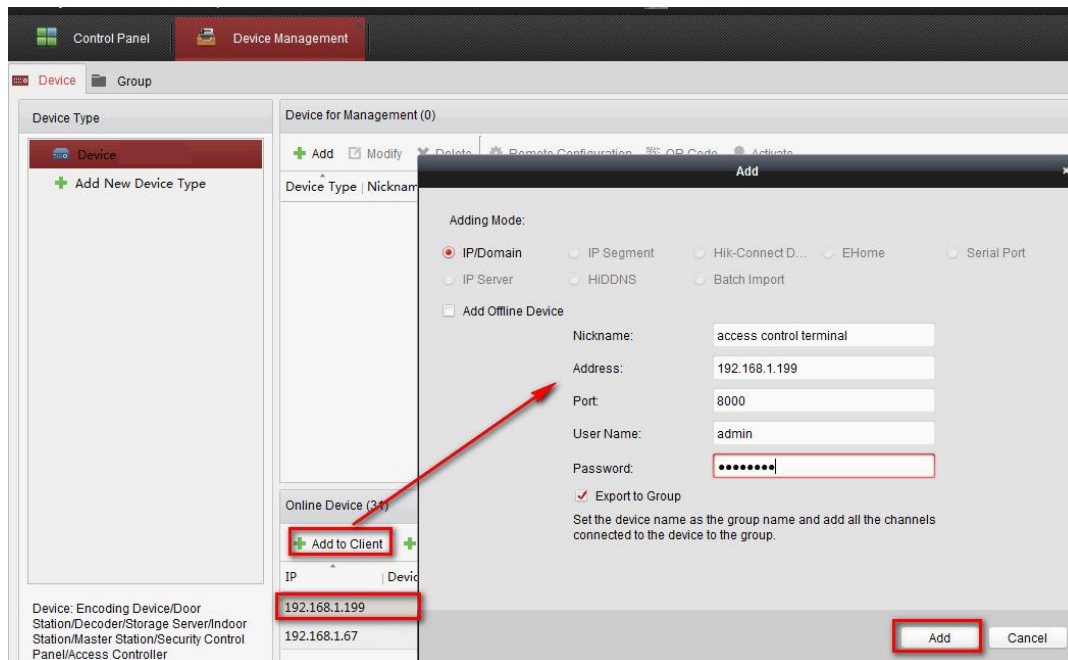


### Step 3:



Select your device and click **Remote Configuration, System > System Maintenance**:

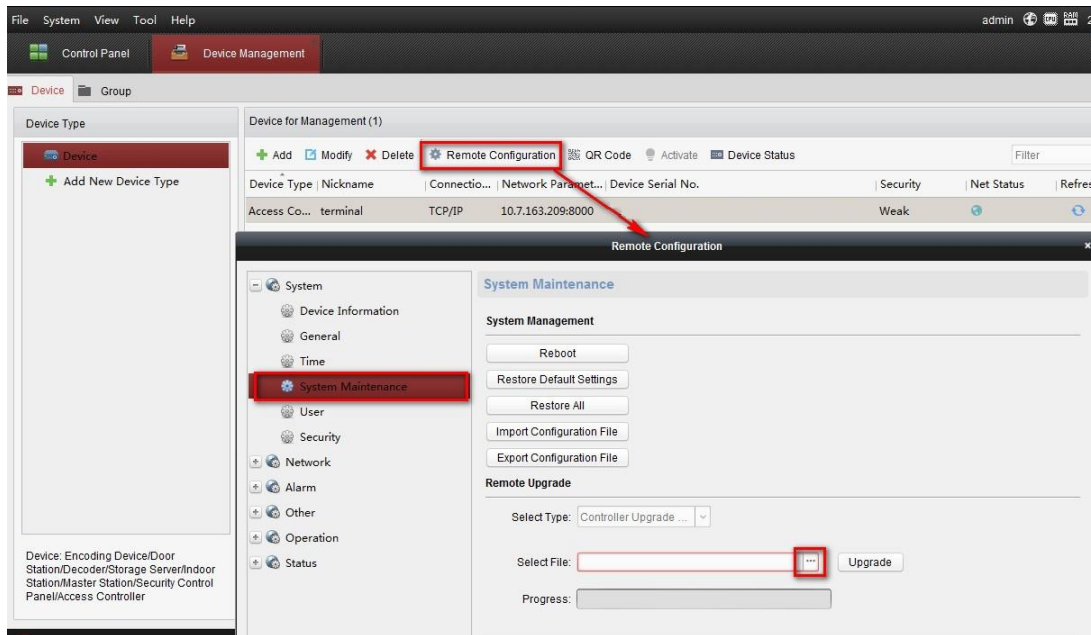

Open your upgrade file:

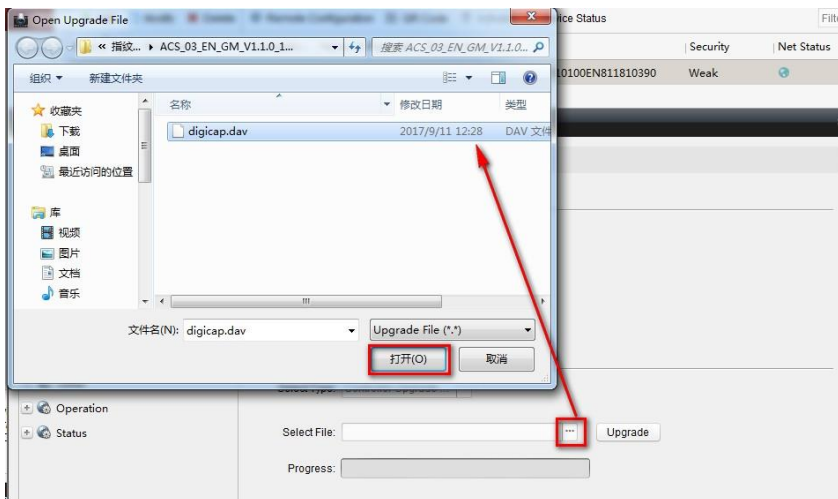


Click Upgrade:

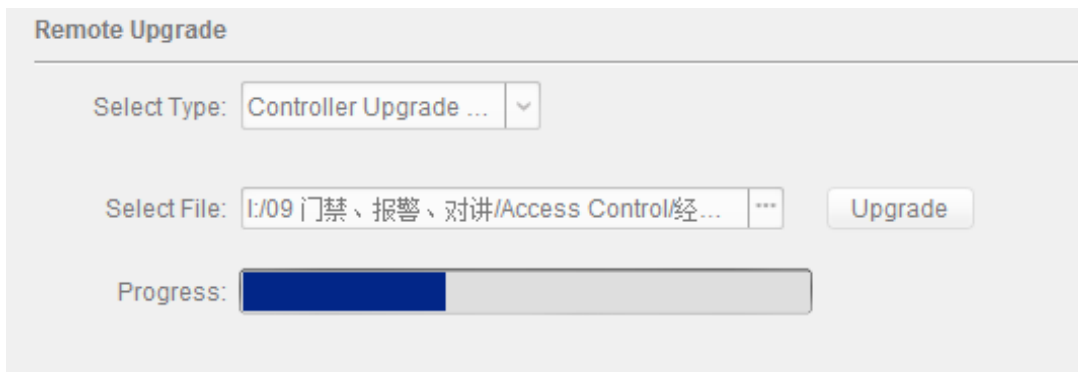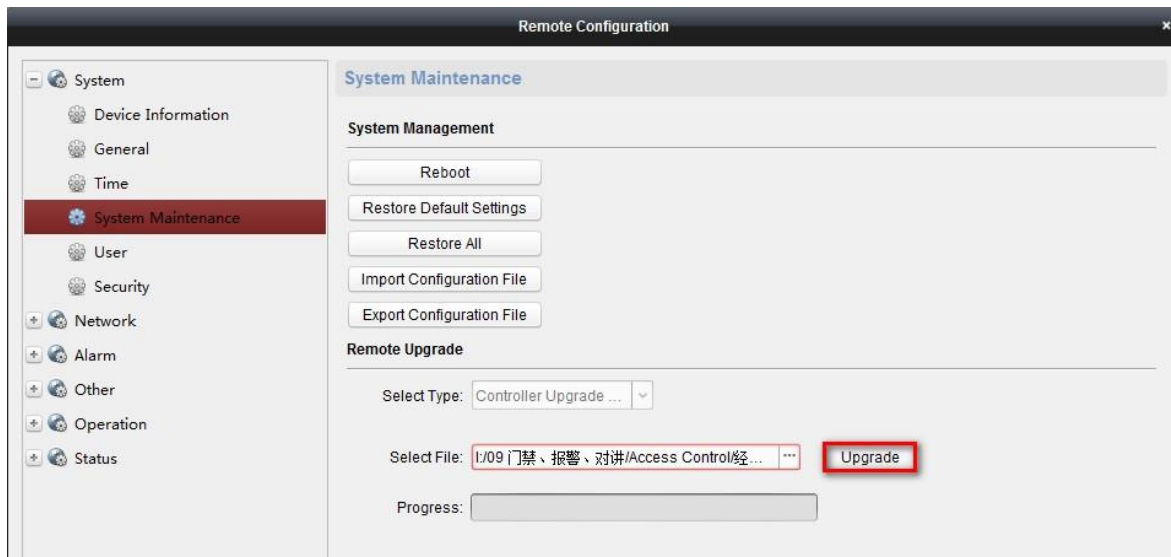

**Step 4:**

Upgrading succeed, please click **OK** to reboot your device

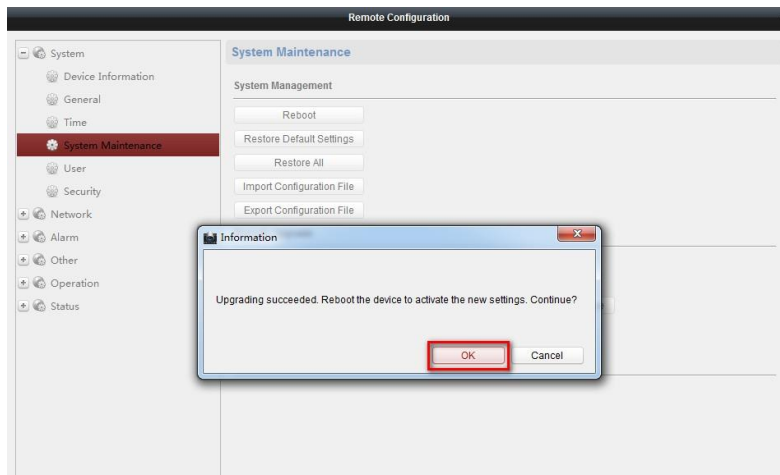

## Part 2: Extension Module

**Step 1:**


Please download the SDKDemo for your devices from official website link below;  
<https://www.visionistech.com/en/vsaxess-desktop-software/>

### Guides and Tools


<h4>VIS-3013</h4> <p>(Fingerprint and Card Reader with Software)</p> <p><b>Guide: How to Upgrade VIS-3013 Devices</b></p> <p><a href="#">Download Guide (PDF)</a></p>	<h4>SADP Tool</h4> <p>Software</p> <p><a href="#">Download SADPTool.zip</a></p>		
<h4>Device Network SDK</h4> <table border="1"><tr><td><a href="#">Download for Windows 32-bit</a></td><td><a href="#">Download for Windows 64-bit</a></td></tr></table>		<a href="#">Download for Windows 32-bit</a>	<a href="#">Download for Windows 64-bit</a>
<a href="#">Download for Windows 32-bit</a>	<a href="#">Download for Windows 64-bit</a>		

**Step 2:**

Find **lib** file, and click **ClientDemoEn** to run SDKdemo:

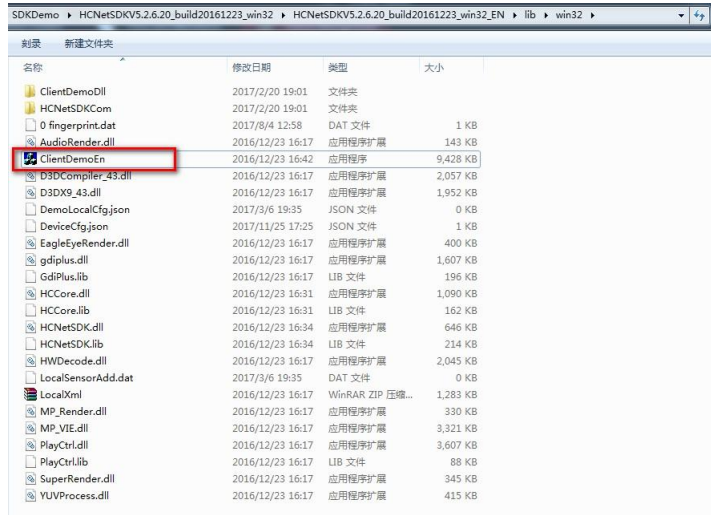


Add device to **SDKDemo** as the following picture;

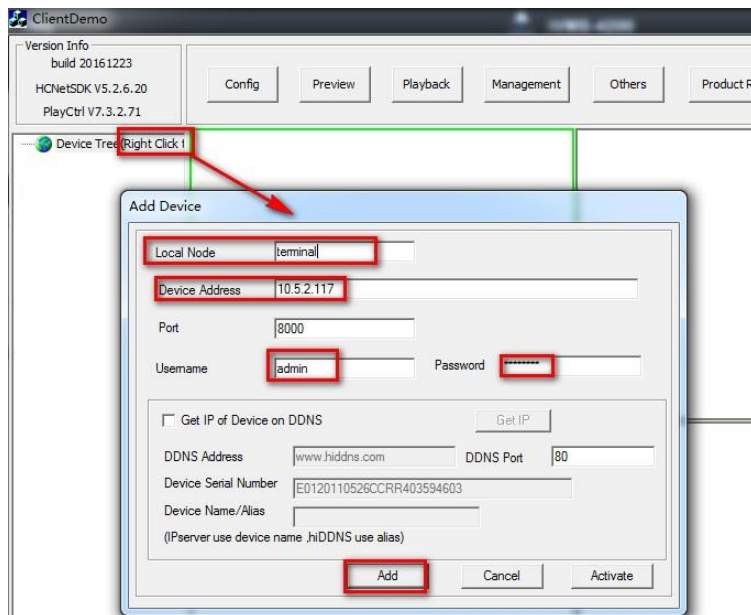


**Step 3:**

Click **Management > Upgrade:**

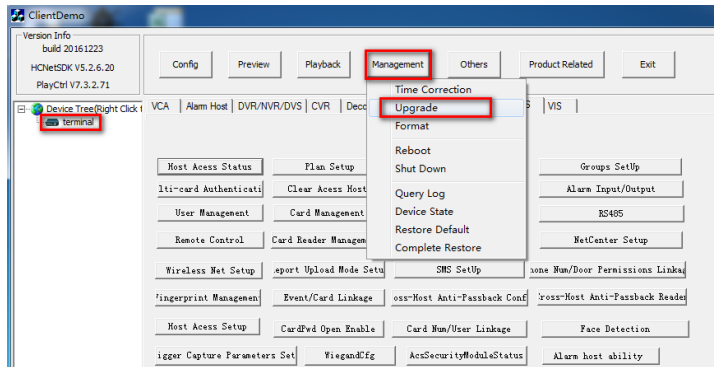


**Step 4:**



Select **ACS** upgrade type and set ACS No. as **1**;

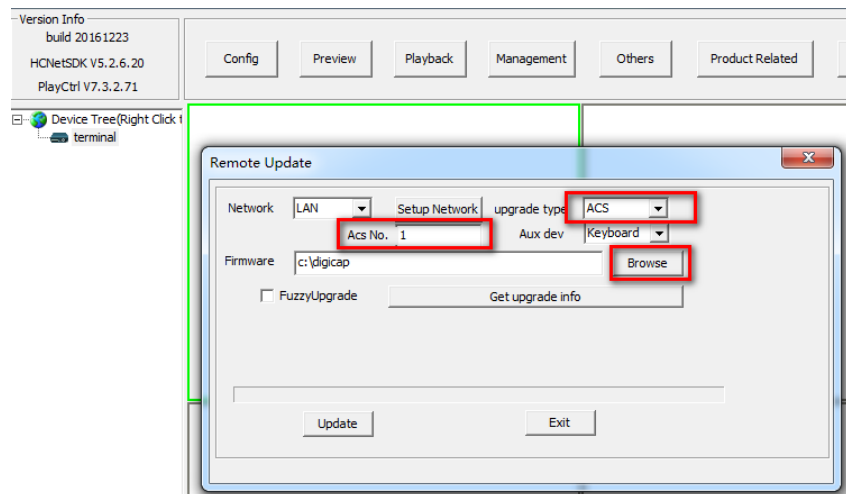

Open your upgrade file:

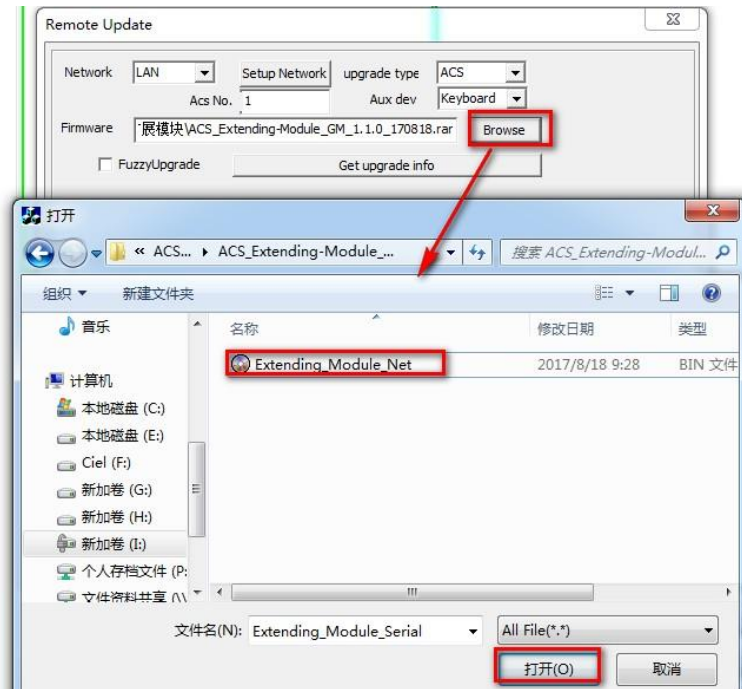


Click **Upgrade**:

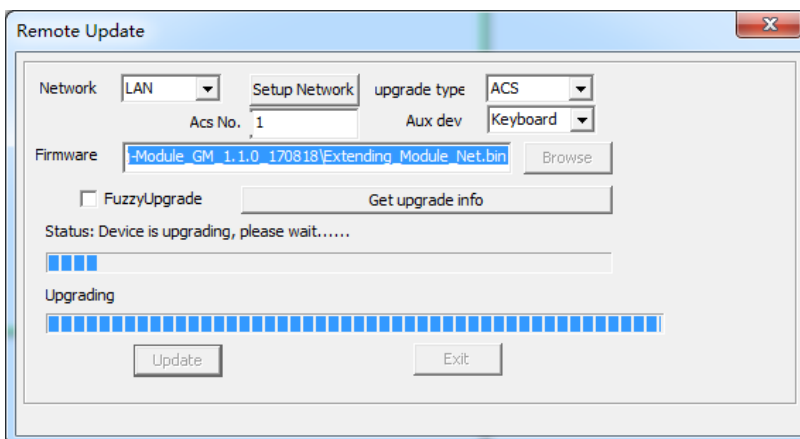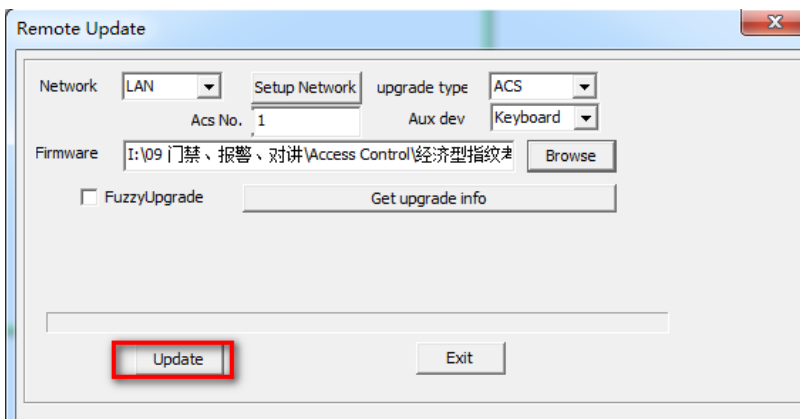

**Step 5:**

On Remote Upgrade interface, please click **Exit** when you see upgrade successfully:

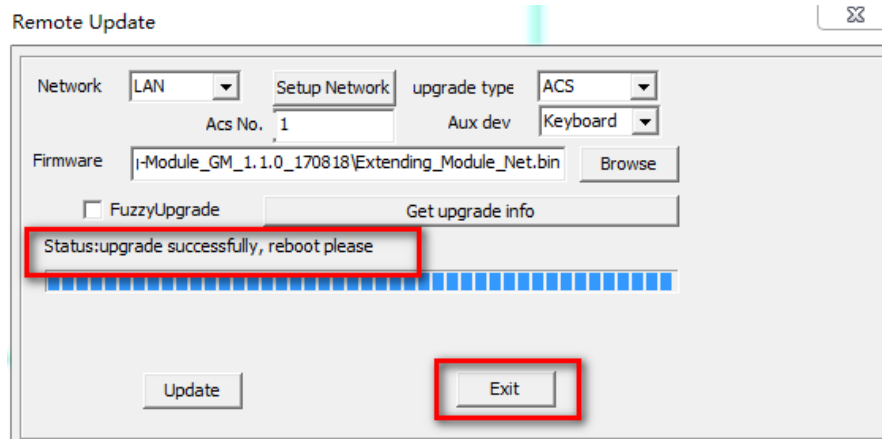

Click **Management > Reboot** to reboot your device:

