



Standalone Application

The device must be connected to the Ethernet to use the software and add fingerprints.



Professional Comprehensive Security Management

Access control, alarm and attendance management system.



E-mail Service

Sends alarm notifications and attendance reports to the manager via e-mail.



Calculate Attendance

Easily generate attendance reports from the software.



Alarm Push

Safety alerts for abnormal events, making management easier.



Staff Care

Monitor employee activity to help improve efficiency.



Multiple Identification Modes are Used in Combination

Fingerprint, RFID are all used


TITAN
VSAXESS
BY VISIONIS

COMPATIBLE SOFTWARE



Need assistance? Contact Us: 1-800-340-0727 // support@visionistech.com // www.visionistech.com

Wiring Diagram

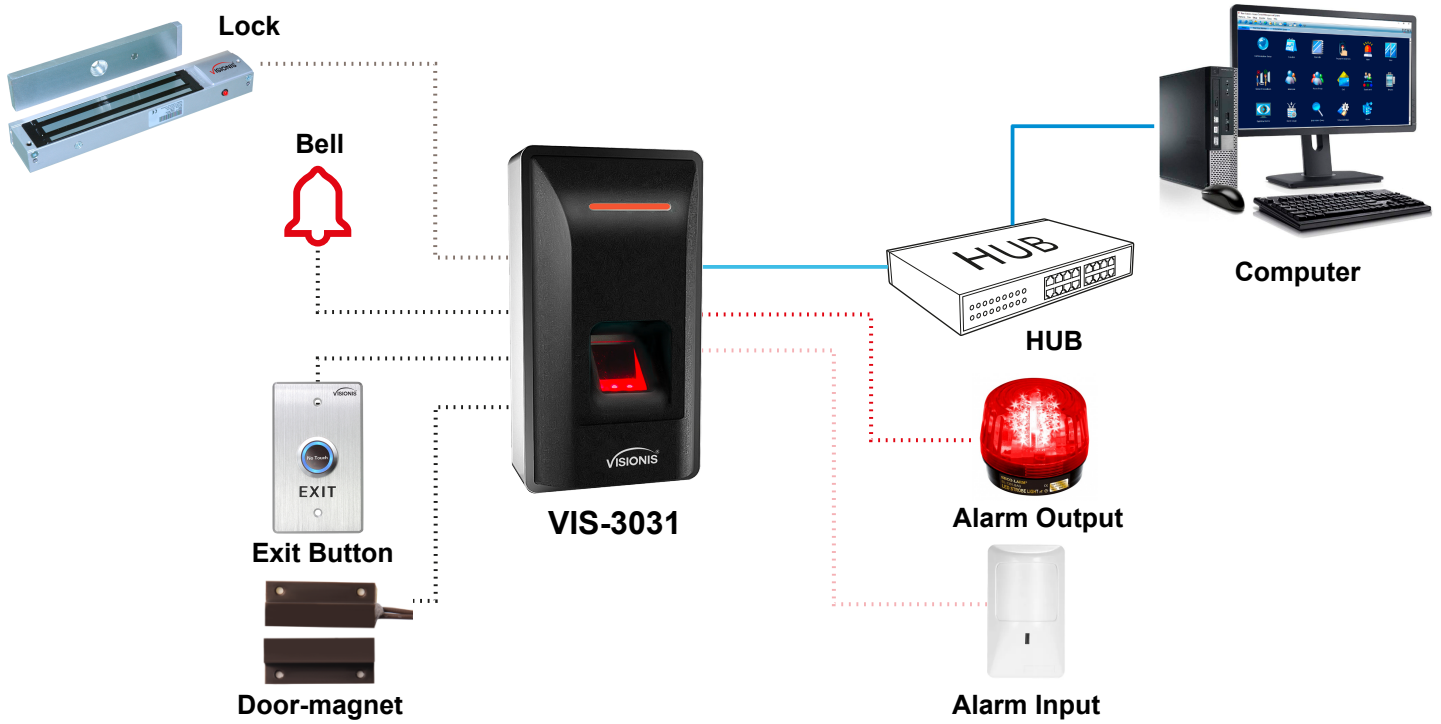

Model No.	VIS-3031
Input Voltage	DC 12V ± 10%
Input Current	1 A
Lock Control Output	1
Alarm Output / Input	1 / 1
Output Format	Wiegand 26~34 bits
Product Dimensions	122L x 77W x 45H mm - (4.80L x 3.03W x 1.77H in)
User Capacity / Record Capacity	3000 / 70000
Access Mode	RFID Fingerprint
Communication Port	TCP/IP
Refusal Rate / False Rate	< 0.01% / < 0.0001%
Operating Humidity	20 ~ 60%
Operating Temperature	-10 °C ~ 45 °C (14 °F ~ 113 °F)
Exit Button Input	1
Door-magnet Port	1
Usage Environment	Indoor only
Wiring Connections	Wiegand input

Need assistance? Contact Us: 1-800-340-0727 // support@visionistech.com // www.visionistech.com