

This product is discontinued

Access Control Outdoor IP66 Weatherproof
Card Reader Standalone No Software
125KHz EM Cards Compatible 2,000 Users

REF.
VIS-3006
VIS-3007



VIS-3006



VIS-3007

Features

- Waterproof, conforms to IP66
- One relay, 2000 users, standalone
- Card type: 125KHz EM card only
- Working temperature: -40°C ~ 60°C (-40°F ~ 140°F)
- Pulse mode, toggle mode
- Built in LDR for anti tamper
- Card block enrolment
- Easy for programming by master cards and remote control

Model No.	VIS-3006 / VIS-3007
User Capacity	2000
Card	EM card
Operating Voltage	9~24V DC
Idle Current	< 40mA
Proximity Card Reader	EM
Radio Technology	125KHz proximity card
Read Range	3~10cm (1.18~3.93in.)
Wiring Connections	Relay output, exit button
Relay	One (NO, NC, Common)
Adjustable Relay Output Time	1-99 Seconds (5 seconds default)
Lock Output Load	2 Amp Maximum
Environment	Meets IP66
Operating Temperature	-40°C ~ 60°C (-40°F ~ 140°F)
Operating Humidity	20% RH ~ 98% RH
Physical	ABS Shell
Color	VIS-3006 (Black) - VIS-3007 (White)
Dimensions	102L x 48An x 20Al (mm) – 4.01L x 1.88An x 0.78Al (in.)
Unit Weight	100g
Shipping Weight	150g



Disclaimer: VISIONIS reserve the right to go ahead with any modifications of models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication. Attention: We are not responsible for the improper installation of this kit. If you are not handy with electrical equipment you should contact a professional electrician. You will also need to check with your local Fire authority to see if you need anything else to comply with local Fire Codes. We are not responsible for any damage or fees that can occur.



sales@visionistech.com




www.visionistech.com

This product is discontinued

Access Control Outdoor IP66 Weatherproof
Card Reader Standalone No Software
125KHz EM Cards Compatible 2,000 Users

REF.
VIS-3006
VIS-3007

Easy for install, 6 wires only

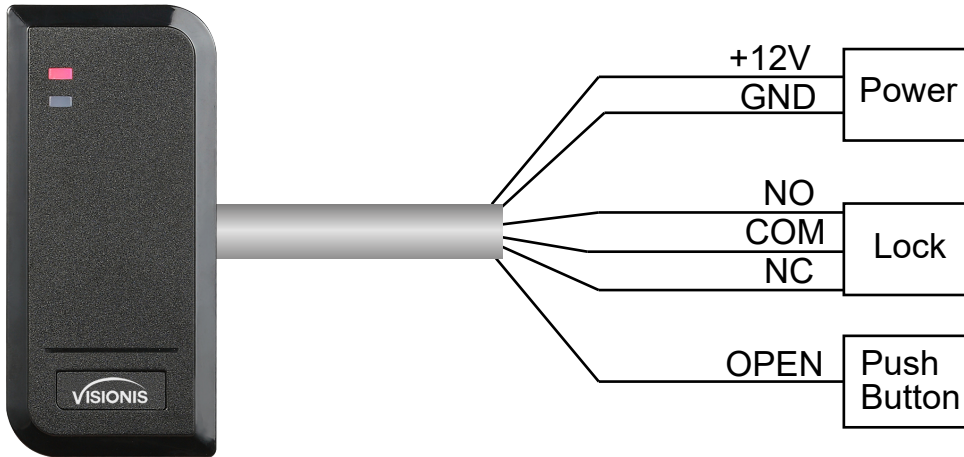

Disclaimer: VISIONIS reserve the right to go ahead with any modifications of models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication. Attention: We are not responsible for the improper installation of this kit. If you are not handy with electrical equipment you should contact a professional electrician. You will also need to check with your local Fire authority to see if you need anything else to comply with local Fire Codes. We are not responsible for any damage or fees that can occur.



sales@visionistech.com



www.visionistech.com