

### IMPORTANT:

Battery in this unit may not be fully charged. After electricity is hooked up to unit, let the battery charge for at least 24 hours. Normal operation of this unit should then take effect (when applicable). To check press "TEST" button. The emergency lamps should illuminate. When re-lamping, only use lamps specified in the exit sign. Using other lamp types may result in transformer damage or unsafe conditions.



### SAVE THESE INSTRUCTIONS!

#### IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

#### READ AND FOLLOW ALL SAFETY INSTRUCTIONS

- Do not use outdoors.
- Do not mount near gas or electric heaters.
- Equipment should be mounted in locations and at heights where it will not be subject to tampering by unauthorized personnel.
- The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition.
- Do not use this equipment for other than its intended use.
- Before wiring to power supply, turn off electricity at fuse or circuit breaker.
- Consult local building code for approved wiring and installation.
- Installation and servicing should be performed by qualified personnel.


#### INSTALLATION (CEILING MOUNT)

1. Remove faceplate and set aside.
2. Connect 20 inch jumper leads to AC input leads in J-Box. Fasten J-box bracket to J-box. Use black wire for 120V. Use orange or red wire for 277V. White wire is common.
3. Fasten canopy to J-box bracket.
4. Remove canopy hole cover on the top and snap housing to canopy.
5. Connect and trim input leads and slide through the canopy and connect to supply leads in the J-box.
6. Connect battery only after continuous AC power can be provided to the unit.
7. Remove proper chevron (s) as required.
8. Secure face plate (s) to housing.

#### INSTALLATION (WALL MOUNT)

1. Remove faceplate and back plate, and set aside.
2. Connect 20-inch jumper leads to AC input leads in J-Box. Fasten J-box bracket to J-box. Use black wire for 120V. Use orange or red wire for 277V. White wire is common.
3. Remove necessary knockouts and fasten back plate to J-Box cover.
4. Snap housing on to back plate.
5. Connect and trim input leads and slide through the hole in the back plate and connect to supply leads in the J-box.
6. Connect battery only after continuous AC power can be provided to the unit.
7. Secure face plate (s) to housing.

#### WIRING DIAGRAM

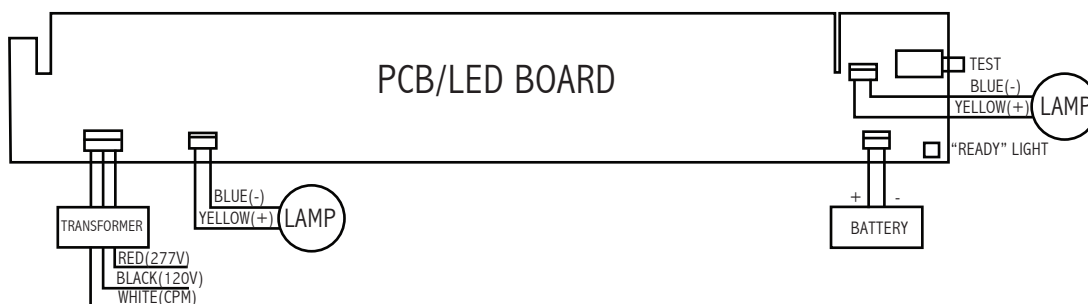

#### Connection of remote emergency light (If applicable)

Use yellow and blue wires for remote fixture(s). Route wires outside of fixture separately or with AC supply wires. Make sure to keep all wires out of the way of the EXIT LEGEND so there are no shadows.