



## Features

- Input voltage range
- Small size, high reliability
- Electromagnetic compatibility, efficiency
- Protection function with door remote control

Model No.	VIS-PS100
Input voltage	110 ~ 240V AC
Input Frequency	50 ~ 60Hz
Output Voltage	DC12V
Output Current	3A
Output Voltage Trim Range	±10% ~ ±15%
Load	1% Typical
Output Stability	0.5% Typical
Ripple and Noise	1%, peak to peak (100mVp-p typical)
Insulation voltage	Junior / sub-polar inter-1500V AC, primary / shell between 1500V AC, sub-polar / Shell between 500V AC
Hold Time	Full load typically 20ms
Operating Temperature	-20°C ~ +65°C (-4°F ~ 149°F)
Overload Protection	All outputs in a short circuit, overload are protected. Power output of 0-15 seconds delay locks
Outer Steel Case Size	120mm x 95mm 38mm (4.72in. x 3.74in. x 1.49in.)
Weight	315g




**Disclaimer:** VISIONIS reserve the right to go ahead with any modifications of models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication. Attention: We are not responsible for the improper installation of this kit. If you are not handy with electrical equipment you should contact a professional electrician. You will also need to check with your local Fire authority to see if you need anything else to comply with local Fire Codes. We are not responsible for any damage or fees that can occur.



sales@visionistech.com



www.visionistech.com

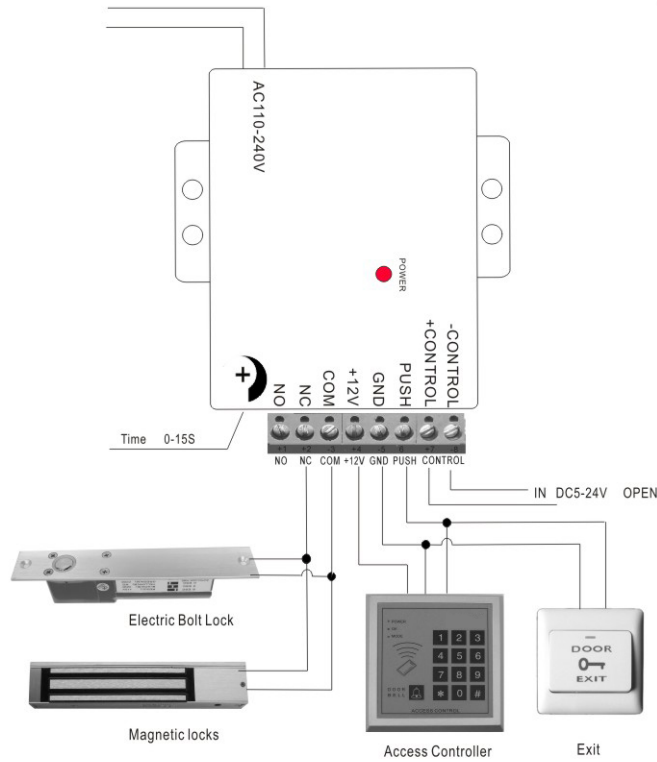

**Disclaimer:** VISIONIS reserve the right to go ahead with any modifications of models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication. Attention: We are not responsible for the improper installation of this kit. If you are not handy with electrical equipment you should contact a professional electrician. You will also need to check with your local Fire authority to see if you need anything else to comply with local Fire Codes. We are not responsible for any damage or fees that can occur.



[sales@visionistech.com](mailto:sales@visionistech.com)



[www.visionistech.com](http://www.visionistech.com)