

MANUAL DE INSTALACIÓN

Vista Frontal



Vista Posterior



Material: 304 acero inoxidable con acabado cepillado

Contacto de Salida: NO/NC/COM


Energía: ≤250VAC 15A

Temperatura para Operación: -20°C hasta +60°C (-4°F hasta 140°F)

Dimensiones Cubierta de Aluminio: 115x115x45mm (4.5pulg. x 4.5pulg. x 1.8pulg.)

Dimensiones con Caja de Montaje: 125x125x45mm (4.92pulg. x 4.92pulg. x 1.8pulg.)

Diagrama de Cableado

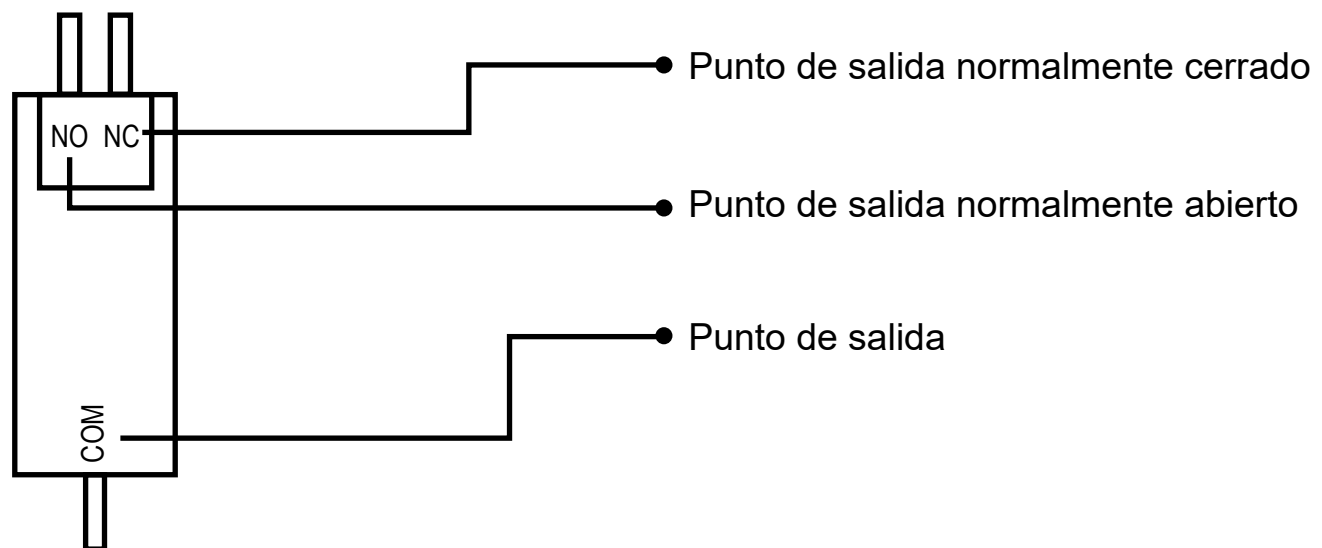

Disclaimer: VISIONIS reserve the right to go ahead with any modifications of models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication. Attention: We are not responsible for the improper installation of this product. If you are not handy with electrical equipment you should contact a professional electrician. You will also need to check with your local Fire authority to see if you need anything else to comply with local Fire Codes. We are not responsible for any damage or fees that can occur.



sales@visionistech.com



www.visionistech.com

Diagrama de Estructura

