



Features

- 2.0 megapixel progressive scan CMOS
- HD digital output, up to 1080p resolution
- 0.1 Lux@(F1.2, AGC ON)
- 120 dB true WDR (Wide Dynamic Range)
- Electronic shutter
- AGC
- USB 2.0
- Applicable for ATM, VTM machines

Model No.		VIS-FENR
Camera	Image Sensor	2.0 megapixel progressive scan CMOS
	Min. Illumination	0.1 Lux@(F1.2, AGC ON)
	Shutter Time	1/25 s to 1/50,000 s - 1/30 s to 1/50,000 s
	Resolution	1920 (H) × 1080 (V)
	Lens	6 mm
	Horizontal Field of View	60° (6 mm)
	Lens Mount	M12
	Frame Rate	1080p@25fps, 1080p@30fps
	SNR	> 62 dB
Interface	Video Output	USB 2.0, 1 HD digital output
General	Operating Conditions	-30° C to 70° C (-22° F to 158° F) Humidity: 90% or less (no condensation)
	Power Supply	5 VDC ± 10%
	Power Consumption	Max. 1.5 W
	Dimensions	40.9(W) × 34.5(L) × 31(H) mm - 1.61(W) × 1.36(L) × 1.22(H) in.
	Weight	Approx. 150 g (0.33 lb.)



Disclaimer: VISIONIS reserve the right to go ahead with any modifications of models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication. Attention: We are not responsible for the improper installation of this kit. If you are not handy with electrical equipment you should contact a professional electrician. You will also need to check with your local Fire authority to see if you need anything else to comply with local Fire Codes. We are not responsible for any damage or fees that can occur.



sales@visionistech.com





www.visionistech.com

USB Pin Description

PIN	DESCRIPTION
1	Shield
2	5 VDC
3	D+
4	D-
5	Ground

Dimensions

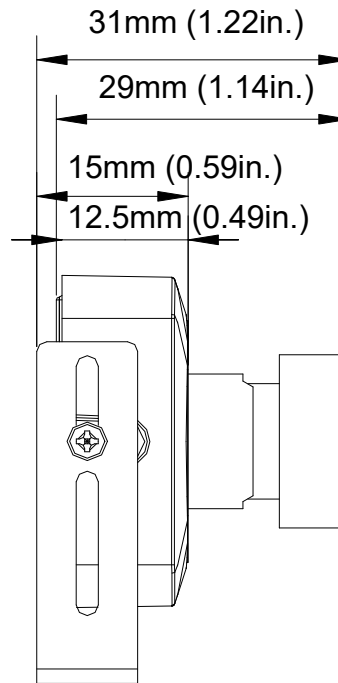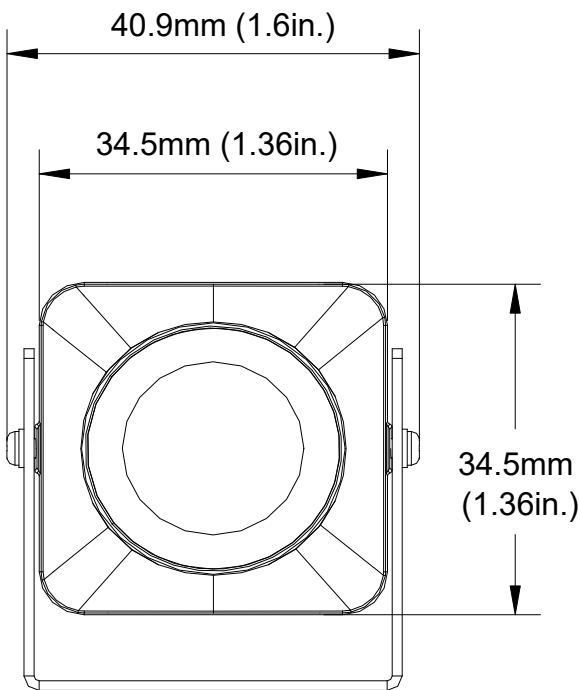

Disclaimer: VISIONIS reserve the right to go ahead with any modifications of models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication. Attention: We are not responsible for the improper installation of this kit. If you are not handy with electrical equipment you should contact a professional electrician. You will also need to check with your local Fire authority to see if you need anything else to comply with local Fire Codes. We are not responsible for any damage or fees that can occur.



sales@visionistech.com



www.visionistech.com