


INSTALLATION MANUAL



These plates are included:

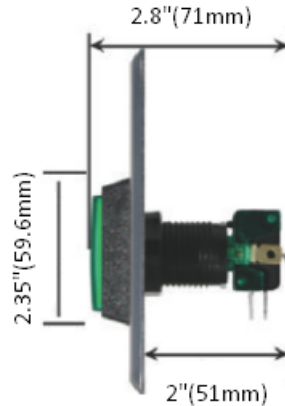


**PRESIONE
PARA
SALIR**

**PUSH
TO
EXIT**

**PRESIONE
PARA
SALIR**

**PUSH
TO
EXIT**

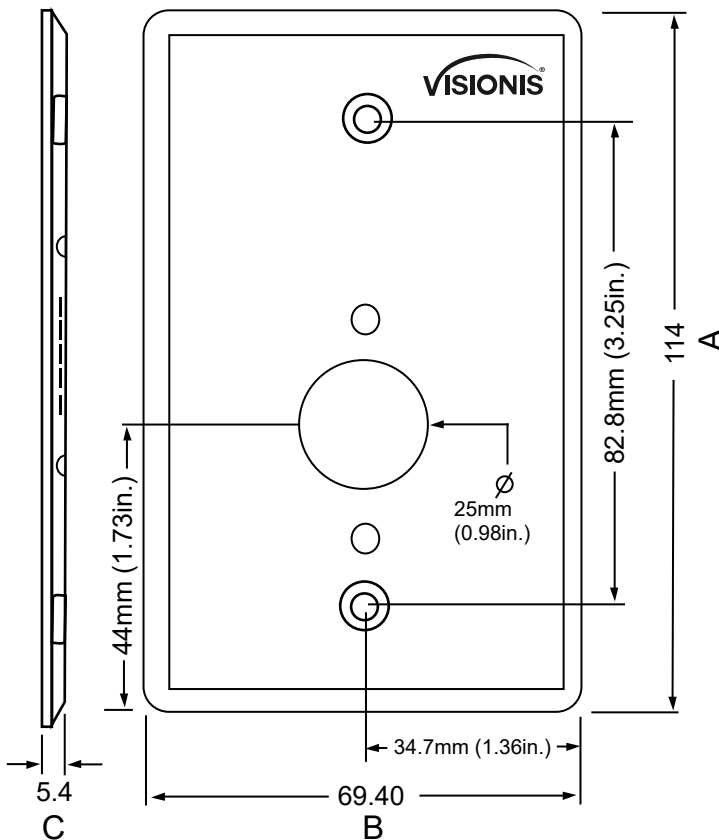

Length (A): 114.0mm (4.46 Inch)
Width (B): 69.40mm (2.73 Inch)
Depth (C): 5.4mm (0.21 Inch)



Disclaimer: VISIONIS reserve the right to go ahead with any modifications of models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication. Attention: We are not responsible for the improper installation of this kit. If you are not handy with electrical equipment you should contact a professional electrician. You will also need to check with your local Fire authority to see if you need anything else to comply with local Fire Codes. We are not responsible for any damage or fees that can occur.



sales@visionistech.com



www.visionistech.com

Push to Exit Button Wiring Diagram



+ : Red
- : Black
COM : Green
N.O. : White
N.C. : Orange

- (1) Push-button dry contact rating: 10A/125VAC
For safe operations, do not exceed the ratings above.
- (2) For normally open requirements, connect wires to N.O dry contact of PUSH-BUTTON
- (3) For normally closed requirements, connect wire to N.C dry contact of PUSH-BUTTON


How to Replace the Plastic Sheet



- ①**
Rotary switch
Counterclockwise



- ②**
Remove the switch
Push the white plastic
Push out the white plastic
seat

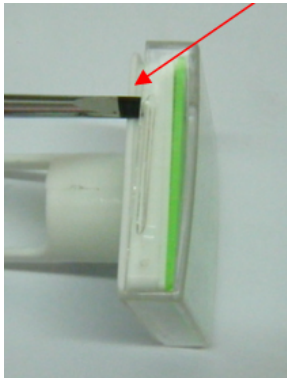

- ③**
Open the cover with
a screwdriver



- ④**
Replace the plastic sheet

